




PCIF BEARING LIMITED

80 mm x 140 mm x 33 mm skf 22216 e bearing

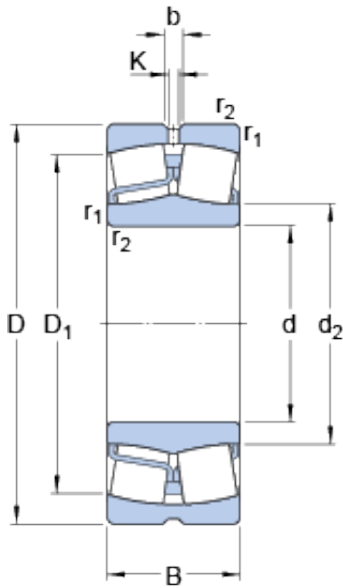

22216 e Bearing 2D drawings and 3D CAD models

Bearing No. 22216 e

Size	140x80x33 mm
Bore Diameter	140 mm
Outer Diameter	80 mm
Width	33 mm
d	80 mm
D	140 mm
B	33 mm
d ₂	94.7 mm
D ₁	124 mm
b	6 mm
K	3 mm
r _{1,2} - min.	2 mm
d _a - min.	91 mm
D _a - max.	129 mm
r _a - max.	2 mm
Basic dynamic load rating - C	243 kN
Basic static load rating - C ₀	270 kN
Fatigue load limit - P _u	29 kN
Reference speed	4300 r/min
Limiting speed	6000 r/min
Calculation factor - e	0.22
Calculation factor - Y ₁	3
Calculation factor - Y ₂	4.6
Calculation factor - Y ₀	2.8



PCIF BEARING LIMITED

Category	Spherical Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	2.15
EAN	7316576652523
Product Group	B04311
Internal Clearance	C0-Medium
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
Bore Profile	Straight
Cage Material	Steel
Enclosure	Open
Number of Rows of Rollers	Double Row
Relubricatable	Yes
Withdrawal Sleeve	Not Applicable
Withdrawal Nut	Not Applicable
Inch - Metric	Metric
Long Description	80MM Straight Bore; 140MM Outside Diameter; 33MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Category	Spherical Roller Bearing
UNSPSC	31171510
Harmonized Tariff Code	84823080
Noun	Bearing
Keyword String	Spherical
Manufacturer URL	http://www.skf.com
Weight / LBS	4.735
Outside Diameter	5.512 Inch 140 Millimeter



PCIF BEARING LIMITED

Bore	3.15 Inch 80 Millimeter
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Width	1.299 Inch 33 Millimeter
bore diameter:	80 mm
maximum rpm:	6000 RPM
outside diameter:	140 mm
operating temperature range:	Maximum of +390 ° F
overall width:	4.3800 in
cage material:	Steel
bore type:	Straight
bearing material:	Steel
outer ring type:	Not Split
precision rating:	Not Rated
internal clearance:	C0
finish/coating:	Uncoated
closure type:	Open
outer ring width:	33 mm
lubrication hole type:	Lubrication Groove & Hole
fillet radius:	2 mm
dynamic load capacity:	236 kN
series:	222
static load capacity:	270 kN
d_2	94.7 mm
D_1	124 mm
$r_{1,2}$ min.	2 mm
d_a min.	91 mm
D_a max.	129 mm
r_a max.	2 mm
Basic dynamic load rating C	243 kN
Basic static load rating C_0	270 kN
Fatigue load limit P_u	29 kN



PCIF BEARING LIMITED

Calculation factor e	0.22
Calculation factor Y_1	3
Calculation factor Y_2	4.6
Calculation factor Y_0	2.8
Mass bearing	2.1 kg