




# PCIF BEARING LIMITED

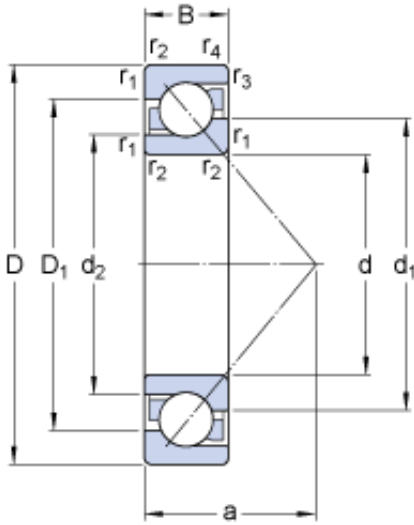

70 mm x 150 mm x 35 mm skf 7314 becbm bearing

Bearing No. 7314 becbm

7314 becbm Bearing 2D drawings and 3D CAD models

Size	150x70x35 mm
Bore Diameter	150 mm
Outer Diameter	70 mm
Width	35 mm
d	70 mm
D	150 mm
B	35 mm
d <sub>1</sub>	101.1 mm
d <sub>2</sub>	84.4 mm
D <sub>1</sub>	121.5 mm
a	64 mm
r <sub>1,2</sub> - min.	2.1 mm
r <sub>3,4</sub> - min.	1.1 mm
d <sub>a</sub> - min.	82 mm
D <sub>a</sub> - max.	138 mm
D <sub>b</sub> - max.	143 mm
r <sub>a</sub> - max.	2 mm
r <sub>b</sub> - max.	1 mm
Basic dynamic load rating - C	127 kN
Basic static load rating - C <sub>0</sub>	98 kN
Fatigue load limit - P <sub>u</sub>	3.9 kN
Reference speed	5600 r/min
Limiting speed	5600 r/min
Calculation factor - k <sub>r</sub>	0.1



## PCIF BEARING LIMITED

Calculation factor - $k_a$	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - $Y_0$	0.52
Calculation factor - $Y_1$	0.55
Calculation factor - $Y_2$	0.93
Calculation factor - X	0.35
Calculation factor - $Y_0$	0.26
Calculation factor - $Y_1$	
Calculation factor - $Y_2$	0.57
Category	Angular Contact Ball Bearings
Inventory	2.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	2.83
EAN	7316577065810
Product Group	B04270
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



## PCIF BEARING LIMITED

Long Description	70MM Bore; 150MM Outside Diameter; 35MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7314 BECBM
Weight / LBS	6.23
Width	1.378 Inch   35 Millimeter
Outside Diameter	5.906 Inch   150 Millimeter
Bore	2.756 Inch   70 Millimeter
bore diameter:	70 mm
radial static load capacity:	98 kN
outside diameter:	150 mm
cage material:	Brass
overall width:	35 mm
outer ring width:	35 mm
contact angle:	40 °
maximum rpm:	5600 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	2 mm



## PCIF BEARING LIMITED

radial dynamic load capacity:	127 kN
series:	73
$d_1$	101.1 mm
$d_2$	84.4 mm
$D_1$	121.5 mm
$r_{1,2}$ min.	2.1 mm
$r_{3,4}$ min.	1.1 mm
$d_a$ min.	82 mm
$D_a$ max.	138 mm
$D_b$ max.	143 mm
$r_a$ max.	2 mm
$r_b$ max.	1 mm
Basic dynamic load rating C	127 kN
Basic static load rating $C_0$	98 kN
Fatigue load limit $P_u$	3.9 kN
Calculation factor A	0.145
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	2.65 kg