




# PCIF BEARING LIMITED

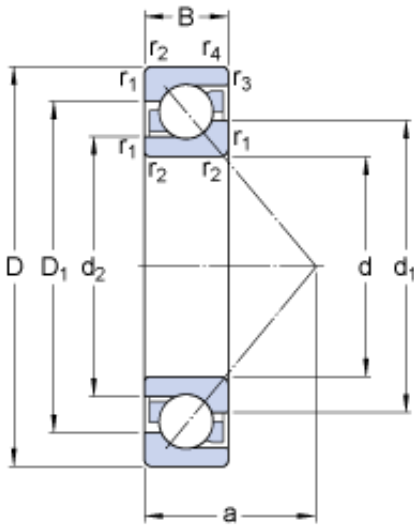

7208 bep Bearing 2D drawings and 3D CAD models

40 mm x 80 mm x 18 mm skf 7208 bep bearing

Bearing No. 7208 bep

Size	80x40x18 mm
Bore Diameter	80 mm
Outer Diameter	40 mm
Width	18 mm
d	40 mm
D	80 mm
B	18 mm
d <sub>1</sub>	56.25 mm
d <sub>2</sub>	48.08 mm
D <sub>1</sub>	65.55 mm
a	34 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
d <sub>a</sub> - min.	47 mm
D <sub>a</sub> - max.	73 mm
D <sub>b</sub> - max.	75.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
Basic dynamic load rating - C	34.5 kN
Basic static load rating - C <sub>0</sub>	24 kN
Fatigue load limit - P <sub>u</sub>	1 kN
Reference speed	10000 r/min
Limiting speed	10000 r/min
Calculation factor - k <sub>r</sub>	0.095
Calculation factor - k <sub>a</sub>	1.4



## PCIF BEARING LIMITED

Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y <sub>0</sub>	0.52
Calculation factor - Y <sub>1</sub>	0.55
Calculation factor - Y <sub>2</sub>	0.93
Calculation factor - X	0.35
Calculation factor - Y <sub>0</sub>	0.26
Calculation factor - Y <sub>1</sub>	
Calculation factor - Y <sub>2</sub>	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.36
EAN	7316576633003
Product Group	B00308
Enclosure	Open
Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	40MM Bore; 80MM Outside Diameter; 18MM



## PCIF BEARING LIMITED

	Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7208 BEP
Weight / LBS	0.785
Outside Diameter	3.15 Inch   80 Millimeter
Width	0.709 Inch   18 Millimeter
Bore	1.575 Inch   40 Millimeter
bore diameter:	40 mm
radial static load capacity:	26 kN
outside diameter:	80 mm
cage material:	Nylon
overall width:	18 mm
outer ring width:	18 mm
contact angle:	40 °
maximum rpm:	11000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	Not Rated
closure type:	Open
fillet radius:	1 mm
radial dynamic load capacity:	37.7 kN
series:	72



## PCIF BEARING LIMITED

$d_1$	56.25 mm
$d_2$	48.08 mm
$D_1$	65.55 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	47 mm
$D_a$ max.	73 mm
$D_b$ max.	75.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
Basic dynamic load rating C	34.5 kN
Basic static load rating $C_0$	24 kN
Fatigue load limit $P_u$	1.02 kN
Calculation factor A	0.0102
Calculation factor $k_r$	0.095
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.37 kg